


Doorslagbeveiligde machinevoeten DNV gecertificeerd

Art.Code	L (mm)	Ls (mm)	K (mm)	D (mm)	H (mm)	B (mm)	M (mm)	d (mm)	Shore A
6012040S	186	158	92	120	42	120	M16i	13,5	40°
6012050S	186	158	92	120	42	120	M16i	13,5	50°
6012060S	186	158	92 </td <td>120</td> <td>42</td> <td>120</td> <td>M16i</td> <td>13,5</td> <td>60°</td>	120	42	120	M16i	13,5	60°
6012070S	186	158	92	120	42	120	M16i	13,5	70°

Indien gewenst is de machinevoet leverbaar met hoogteverstelling

- L = lengte
- Ls = hartafstand bevestigingsgaten
- K = diameter kap
- D = diameter
- H = hoogte
- B = breedte
- M = schroefdraad
- d = boring
- Shore A = hardheid

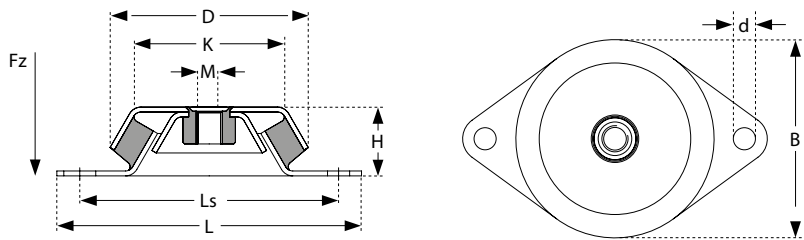

Belasting Fz

